

Kit 1 - HD LCD Monitor with 2 Bullet Camera's



Features

- CCTV home security system suitable for most homes
- Easy to install - simply plug and go
- Includes an HD LCD monitor 1280 x 720
- Full HD resolution video recording and playback
- Kit includes two weatherproof high resolution 1.3MP bullet cameras
- Add up to 2 additional bullet or dome cameras for a fully supported 4 camera CCTV system
- Powerful infrared LED night vision cameras with 200m line of vision
- LCD monitor and cameras communicate using their own Wi Fi network
- Compatible mobile app for controlling the cameras and playback on the move
- Recordings are stored on a standard SD card (4GB included)
- System supports up to 64GB SD card memory for up to 132 hours continuous recording
- Remote live viewing via App (iOS / Android)
- FHSS encryption technology to reduce interference and maintain security
- Automatic IR Cut for enhanced image quality
- Scheduled, motion or continuous recording that is time and date stamped

Ordering Details

Product	Part No.
Kit 1	
LCD Monitor and Bullet Cameras	CV-LCD-EX-M703SN4
Additional Accessories	
Bullet Camera	CV-CAM-EX-C706DW1
Dome Camera	CV-CAM-IN-C701DW4

National
Seal Systems
Limited

Unit 210 Holly Road, Western Industrial Estate.
Naas Road, Dublin 12
Ph 00353-1-4565170 Fax 00353-1-4502371
Email: info@nationalseal.ie web: www.nationalseal.ie

Kit 1 - HD LCD Monitor with 2 Bullet Camera's



Technical Information

LCD Monitor with built in DVR

Item	Parameter	
System	Display Screen	7" LDC (16:9)
	Resolution	800(H) x RGB x 480(V)
Wireless Video & Audio Output	Frequency Range	2.400GHz ~ 2.483GHz
	Receiving Range	Up to 200m line of sight
	Receiving Sensitivity	-89dBm
AV Output	Video Output	1ch CVBS 1.0Bp-p, Impedance 75
	Audio Output	None
Record & Playback	Picture Compression	MPEG4
	Recording Format	.ASF
	Recording Mode	Manual / Schedule / Motion detection
Framerate	Local	Realtime encoder - VGA 30FPS, HD 20FPS @90MHz
	PC Playback	VGA - 30 FPS, HD 720p - 30FPS
Connector	Mini USB	Used for software update (manufacturer use only)
	SD Card	64GB MAX (4GB supplied)
	Power Supply	DC12V / 1.25A
	Power Consumption	6W max.
Environmental	Operating Temperature	0C ~ + 50C
	Operating Humidity	10% ~ 90%
	Atmosphere Pressure	86kpa ~ 106kpa
	Dimensions (W*H*D)	183mm x 136mm x 30mm
	Weight (Without Package)	470g

Camera - Bullet and Dome

Item	Parameter	
System	Image Sensor Type	1/4" Colour CMAS Image Sensor
	Effective Pixel	1.3MP
	Lens	f=3.6mm
	IR LED	24pcs, Ø5mm
	AGC	Auto
	White Balance	Auto
	Transmission Power	14-18dbm
	Environmental Rating	IP65
Environmental	Power Supply	DC5V/1A
	Power Consumption	4W MAX
	Operating Temperature	-20C ~ + 50C
		Bullet Cam Dome Cam
Dimension (W*H*D)		95mm x 140mm 80mm x 100mm
Weight (without package)		327g 297g

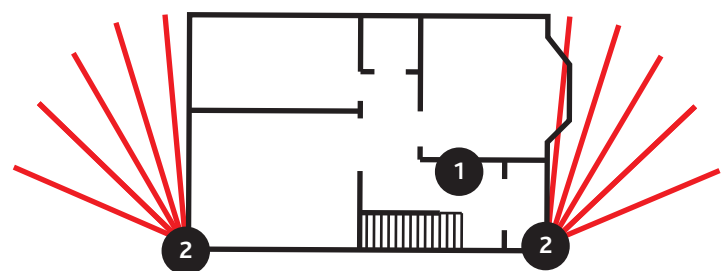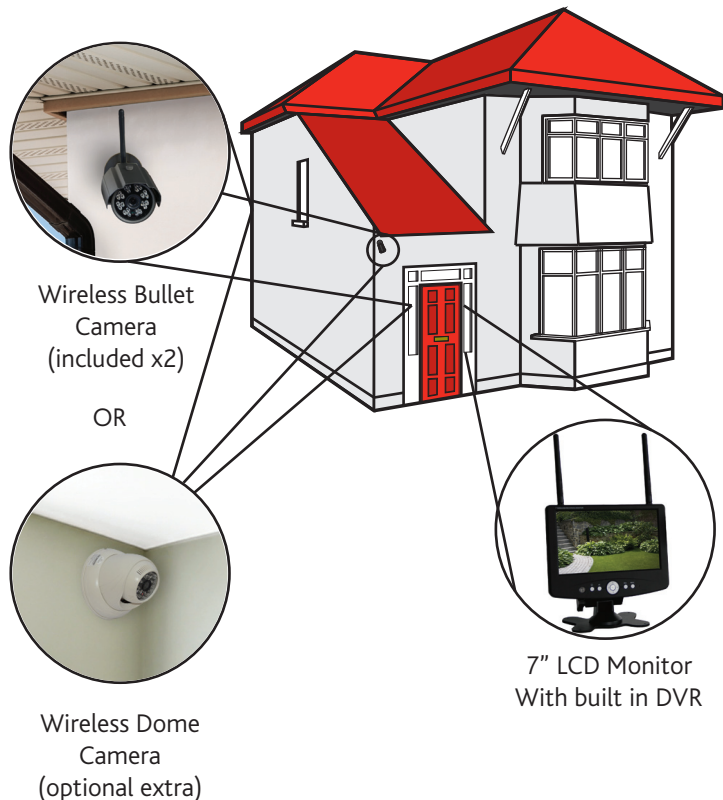

- 1 7" LCD with combined DVR
- 2 2x Wireless Bullet cameras

Packaging

1 kit per box

Includes: 7" Monitor with built in DVR, Bullet Camera x 2, 4GB SD Card, power supply, installation instructions and User guide

NSS reserves the right to change specification without notice
It is the responsibility of the householder or installer to ensure that the finished product meets any required safety and performance specification.