



GLAZING TAPES

Glazing Tapes and Systems

Hodgson Sealants supply a range of glazing tapes to meet the demands of Fully Bedded and Drained & Ventilated timber frames in different situations. Use of Hodgson Sealants products in our industry recognised glazing systems offers added assurances with regard to exposure rating, weathertightness, air permeability, movement accommodation and security depending upon the glazing system selected. For full details on our glazing systems please see the Glazing Systems Selector on our website.

| Products Used | The Hodgson Sealants Glazing System | | | | | | | |
|---------------|-------------------------------------|--------------------------------|---------------------------|------------------------------------|------------------------------------|---------------------------|------------------------------------|--|
| | B5 – Fully Bedded Bead Glazing | B6 – Fully Bedded Bead Glazing | D3 – Drained & Ventilated | D4 – Drained & Ventilated Security | D5 – Drained & Ventilated Security | D8 – Drained & Ventilated | D9 – Drained & Ventilated Security | R1 – Re-glazing, Fully Bedded Bead Glazing |
| Flexistrip® | | ✓ | ✓ | | | | | ✓ |
| Flexibond | | | | ✓ | | | | |
| Foamsekure XD | | | | | ✓ | | ✓ | |
| Profile Tape | | | | | ✓ | ✓ | | |
| Butyl 66 | ✓ | | | | | | | ✓ |
| Silfix® U9 | ✓ | ✓ | | | | | | ✓ |



Flexistrip®

Product Description

Market leading load bearing security glazing tape, made from butyl. Tested to BS 6375 (weathertightness) and BS 7950 (security).

Applications

Installing double glazed units and laminated glass into timber and steel windows and doors. Used in fully bedded glazing systems.






Flexibond

Product Description

Market leading load bearing security glazing tape, made from butyl. Tested to BS 6375 (weathertightness) and BS 7950 (security).

Applications

Installing double glazed units and laminated glass into timber and steel windows and doors. Used in drained and ventilated systems.

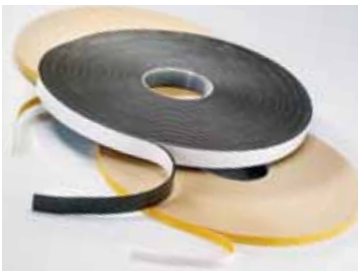

Foamsekure XD

Product Description

Double sided foam tape – glazing.

Applications

Exceptional shear strength and long-term adhesion, comprising of a closed cell foam. Specifically designed for security glazing into timber and PVCu windows and doors.



Foamsekure BMS

Product Description

Double sided foam tape – bar mounting.

Applications

Bonding coated timber and PVCu glazing bars and PVCu trims. Can be used for mounting lightweight components typically found in the automotive, caravan and electrical industries.

Profile Tape

Product Description

Closed cell EPDM Rubber Glazing Tape capable of withstanding extremes of temperature.

Applications

Installing double glazed units and laminated glass into timber windows and doors. Used in drained and ventilated systems.

| PRODUCT | SIZE & QUANTITY | | COLOURS |
|--------------|------------------|----------------|----------------------------|
| Flexistrip® | 9mm x 2.5mm | 24 x 19m Reels | Off White, Mahogany |
| | 12mm x 2.5mm | 20 x 19m Reels | Off White, Mahogany |
| | 12mm x 3mm | 20 x 15m Reels | Off White, Mahogany, Black |
| | 15mm x 2.5mm | 16 x 19m Reels | Off White, Mahogany |
| | 15mm x 3mm | 16 x 15m Reels | Off White, Mahogany |
| | Jumbo 15 | 10 x 30m Reels | Off White, Mahogany, Black |
| Flexibond | 15mm x 2.5mm | 10 x 30m Reels | Off White, Mahogany, Black |
| Profile Tape | 8mm x 4mm | 6 x 150m Reels | Black |
| | 9mm x 3mm | 6 x 150m Reels | Black |
| | 9mm x 4mm | 6 x 125m Reels | Black |
| | 10mm x 5mm | 6 x 100m Reels | Black |
| | 12mm x 3mm (lip) | 6 x 100m Reels | Black |